

KQRF-GP **GENERAL PURPOSE FLAT-FACE**

ISO 16028 COUPLING

This high-performance, Italian-made coupler features a steel body with zinc coating to resist corrosion, while handling high pressure. It offers a lower price point than its alternatives without compromising on quality.




TECHNICAL DETAILS

SPECIFICATIONS

- Material:** Steel
- Coating:** Zn-Fe (Cr III)
- Standards:** ISO 16028
- Working Temperature:** -25°C to 100°C
- Connection under residual pressure:** not allowed


Nominal Size				Max. Working Pressure	Rated Flow	Max. Flow Rate	Min. Burst Pressure			Fluid Spillage
DNP	BG	ISO	mm				Male	Female	Coupled	
20	3	12.5	10.7	25 MPa	45 L/min	90 L/min	150 MPa	110 MPa	190 MPa	0.012 cc

1 MPa = 145.04 psi · 1 l = 0.264 gal

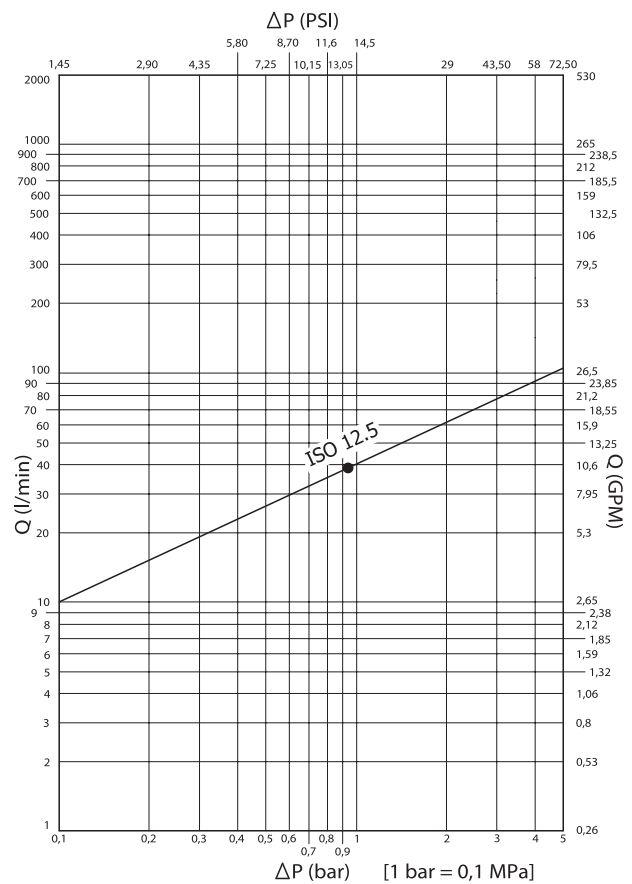

More information overleaf -->

KQRF-GP **GENERAL PURPOSE FLAT-FACE**

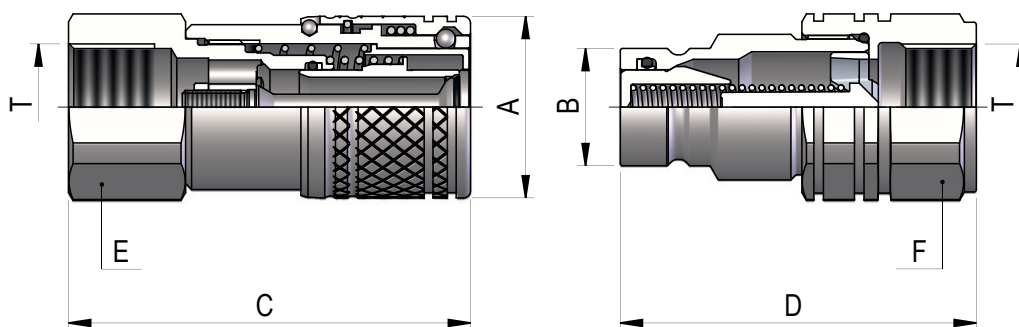

Part Number	DNP Part Number	ISO Body Size	Working Pressure (BAR)	Flow Rate (LMP)	T (Thread)	Outside Diameter		Length		Hex	
						A	B	C	D	E	F
KQRF-08-08AF-GP	PLT1.2013.002	12.5	250	45	1/2 BSPP	A	38	C	78.5	E	32
KQRF-08-08AM-GP	PLT1.2013.003					B	24.55	D	72.5	F	36