


# 100R2PWH **ACCESSORY HOSE**

## WATERBLAST HOSE

This two-wire braided hydraulic hose is designed for professional pressure cleaning applications. Its outer cover enhances detergent, weather, ozone and abrasion resistance. Meets or exceeds EN1829-2 and ISO 7751 standards.

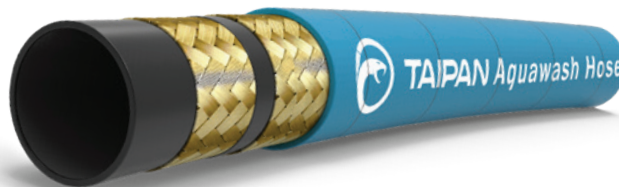

## TECHNICAL DETAILS

### CONSTRUCTION

**Inner Tube:** Synthetic rubber  
**Reinforcement:** Two braids of high-tensile steel wire  
**Outer Cover:** Detergent, ozone, weather, and abrasion resistant synthetic rubber, blue

### APPLICATION

Professional pressure cleaning applications.

### SPECIFICATIONS

**Standards:** Meets or exceeds EN1829-2 & ISO 7751  
**Temperature Range:** -10°C - 155°C  
**Hose Tails:** K series

Part Number	Size (in)	ID (mm)	OD (mm)	Working PSI	Min. Burst Pressure (PSI)	Min. Bend Radius (mm)	Reel Length (m)	Weight (kg/m)
100R2PWH-06	3/8	9.9	18.4	5800	19140	125	Random	0.44



**TAIPAN**

Email: [sales@taipan.com.au](mailto:sales@taipan.com.au)  
Fax: 07 5428 1311

**CONTACT US 1300 654 782**  
[www.taipan.com.au](http://www.taipan.com.au)