



TAIPAN
Hydraulic Hose Systems



TX6000

FOR AUSTRALIA'S HARSH INDUSTRIAL AND CLIMATIC CONDITIONS

Introducing the Taipan Xtreme TX6000, a hydraulic hose that has been meticulously developed for over 20 years to offer versatility and withstand the most challenging conditions found in Australia. This premium line of hoses from Taipan is designed to deliver exceptional performance.


The TX6000 features an ultra-durable cover that exceeds the industry standard tenfold, ensuring remarkable

longevity. With its 2000-hour ozone resistance and a bend radius that outcompetes many major brands this hose is guaranteed to endure even the harshest industrial, environmental, and climatic conditions in Australia.

The rigorous testing of the TX6000 range also aimed to create multiple hose tail options, with the goal of streamlining customer inventory and offering a wider range of choices.

TX6000

This highly flexible, compact, multispiral hydraulic hose with reduced bend radius and bending force meets **ISO 18752-CC** and exceeds SAE100 R15.

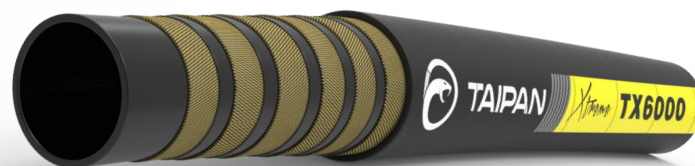

TECHNICAL DETAILS


TUBE

Synthetic rubber, resistant against hydraulic fluids [HL, HLP, HVLP, HFA, HFAS, HFB, HFC] and bio-degradable hydraulic fluids.

PERFORMANCE

Impulse tested up to 500,000 cycles @7300psi & 120% over it's working pressure.
[tested acc. to IS6803:2017]

Part Number	Size (In)	ID (mm)	OD (mm)	Working PSI	Min Burst Pressure (PSI)	Min Bend Radius (mm)
TX6000-06	3/8	9.9	20.2	6090	24360	65
TX6000-08	1/2	13	22.9	6090	24360	90
TX6000-10	5/8	16.4	26.5	6090	24360	100
TX6000-12	3/4	19.5	30.5	6090	24360	120
TX6000-16	1	25.9	37.5	6090	24360	150
TX6000-20	1 1/4	32.5	47.3	6090	24360	400

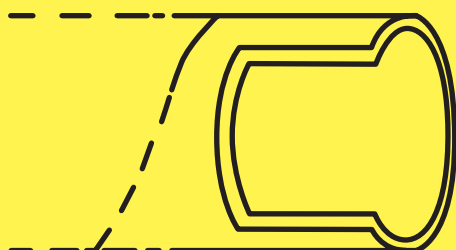

TX6000 COVER

- Very high wear and abrasion resistance
- Very high ozone resistance
- Very high weather and salt water resistance
- Flame retardant
- MSHA approved

ABRASION VALUES ACC. TO EN 853.

Grams lost per 2000 cycles

EN 853	0.50
S-STANDARD	0.20
MSHA/ FHL	0.20
TX6000	0.05

Abrasion [g]

OZONE RESISTANCE ACC. TO ISO 7326

• Extrapolated Values Singular Test Result

ISO 7326	72
S-STANDARD	400
MSHA/ FHL	400
TX6000	2000*

Ozone resistance [h]

NORTH BRISBANE

11-13 Lear Jet Drive
Caboolture, QLD 4510
P: 07 5428 1211

SOUTH BRISBANE

41 Shettleston Street
Rocklea, QLD 4106
P: 07 3274 3433

ADELAIDE

Warehouse 1
Lot 552 Wilkins Rd
Wingfield, SA 5013
P: 08 8448 3969

MELBOURNE

23 Endeavor Way
Sunshine West, Vic 3020
P: 03 9109 2109

PERTH

3 Mordaunt Cct
Canning Vale, WA 6155
P: 08 9456 5448

CONTACT US 1300 654 782

taipan.com.au